



imants

Digging the future

FWX new foldable spading machine in the hitch

read more

www.imants.com

imants
Digging the future

**New
machine!**

The current situation means that the demand for greater capacity is becoming increasingly important.


With this new foldable spading machine, we offer the capacity of a 6-meter spading machine combined with the flexibility and portability of a mounted machine.

Thanks to its hydraulically protected and foldable ripper tines, the machine allows you to subsoil, spade, prepare a seedbed, and sow in a single pass without wasting time on transport changes.



To avoid downtime caused by changing shear bolts, the machine is equipped with 10 height-adjustable, hydraulically locked ripper tines.

Even more capacity!

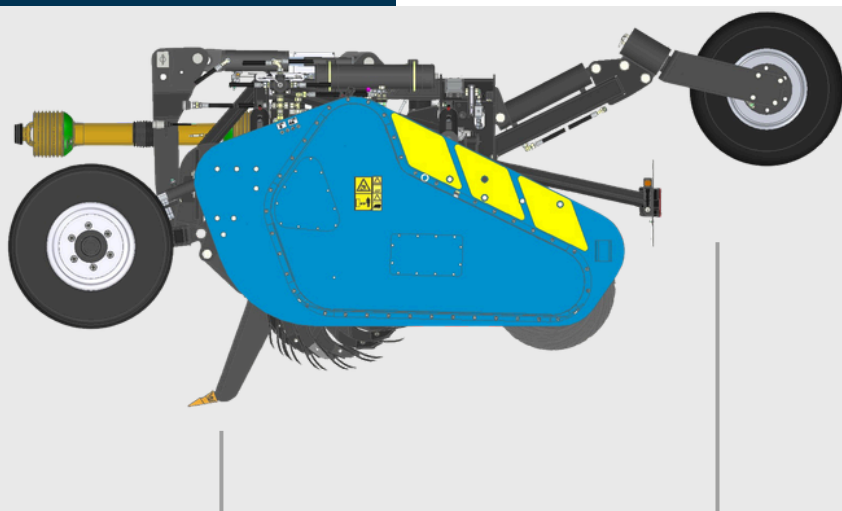

Ripper tines equipped with hydraulic safety devices

Foldable transport wheel


► Image: Cross-section of the FWX

Advantages of the foldable spading machine in the hitch

- ◆ **6-meter working width = high capacity**
More hectares per hour, fewer labor hours, and lower costs per hectare. Do the math.
- ◆ **Foldable, yet sturdy**
As a result, the machine is very compact on the road, agile, easy to maneuver on small plots, and can switch between plots more quickly.
- ◆ **Hydraulically locked ripper tines**
This protects the frame, the ripper tines, and the tractor from overload and stones.
- ◆ **The next step in capacity and logistical efficiency.**


SCAN
for animation



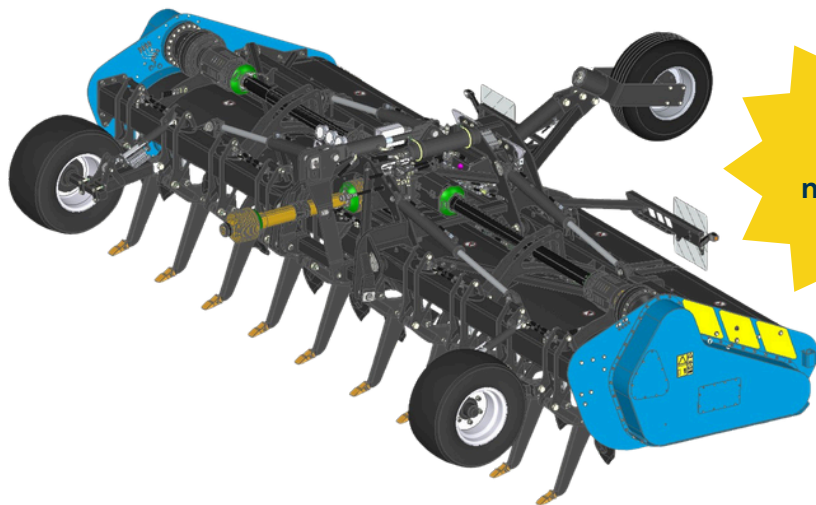


**New
machine!**

- ▶ The image shows the FWX extended to a working width of 6 meters

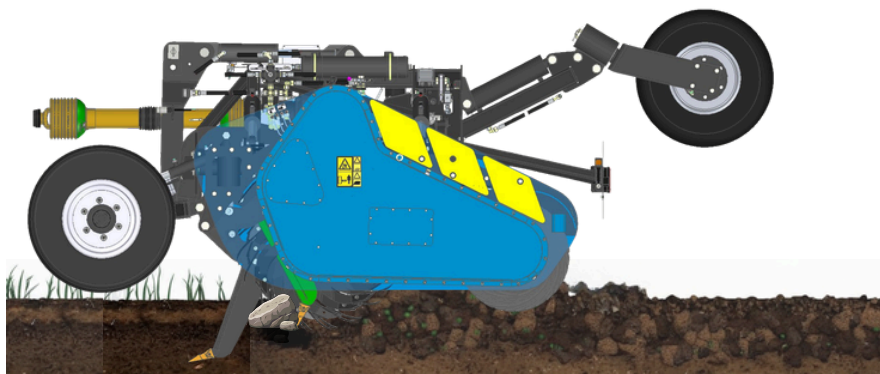


- ▶ The image shows the hydraulic rock protection on the ripper tines. The ripper tine marked in green is folded backward.

Spec. sheet FWX600H

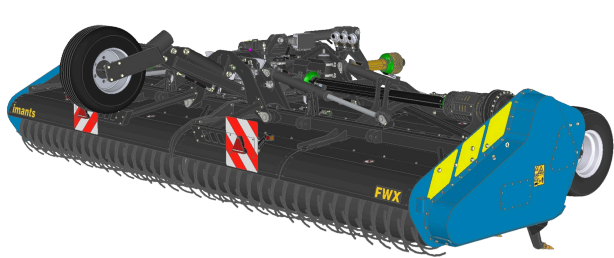

General	FWX 600 H
Categorie trekker Tractor Category	3
Werkbreedte Working width	6000 mm 20'
Rijsnelheid Operating speed	5,5 km/h 3,4 mph
Capaciteit Capacity	3 Ha/u 8 Acre/h
Afmeting en gewichten Measurements and weights	
Hoogte (staand op 4 poten uitgeklap) Machine height (on 4 legs, expanded)	1920 mm 76 "
Lengte totaal Length total	4081 mm 161 "
Breedte totaal Machine width total	6430 mm 253 "
Breedte Opgeklapt Machine width folded	2970 mm 117 "
Gewicht Weight	5120 kg 11288 lbs
Spitas/woeler gegevens Details on spading shaft/tines	
Aantal Woelers Number of tines	10
Werkdiepte onder spitass Working depth below spading shaft	175 - 125 - 75 - 25 mm 6,9 - 4,9 - 2,9 - 0,9 "
Werkdiepte instelling per Working depth setting every	3x 50 mm 3x 2 "
Tussenafstand woelers Distance inbetween tines	580 mm 39/22 "
Breedte beitel Width tine point	70 mm 2,8 "
Aantal spitassen Number of spading shafts	2
Aantal hele rondsels per spitass Number of spade banks	4
Spitbeugels per rondsel Number of spade arms per bank	2 L, 2 R
Aantal spitbladen per spitass Number of spade blades	22
Spitblad breedte Spade blade width	250 mm 9,8 "
Spitdiepte maximaal tot slob Maximum spading depth	250 mm 9,8 "

Questions? Call or text us!

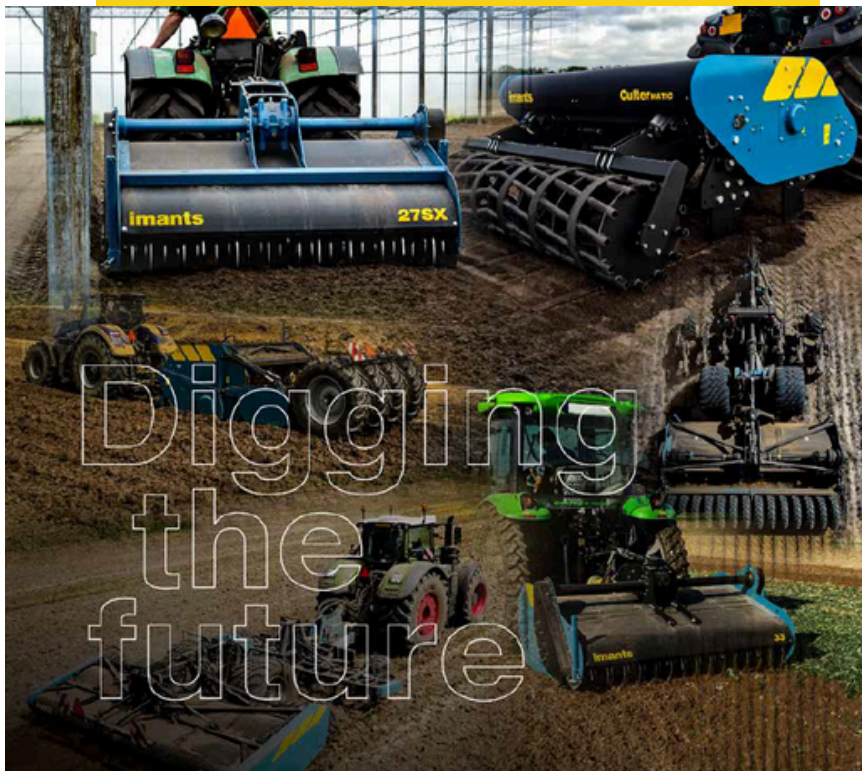

Imants B.V.

Phone number
+31 (0)497 642433

E-mail
info@imants.nl

Website
www.imants.com